



## AALED2/WV/CCT/M3



## Features

- All polycarbonate multi-purpose LED square bulkhead
- LED performance exceeds CFL equivalents
- Push fit feed-in, feed-out terminals for speed and ease of installation
- Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K
- Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance
- Instant light output and unlimited switching
- LED lifespan L70 56,000 hours



## General Information

<b>Lamp Type</b>	LED
<b>Colour / Finish</b>	White / Visiluxe
<b>Emergency</b>	Yes
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK09
<b>Class Protection</b>	1
<b>Internal / External</b>	Internal/External
<b>Surface / Recessed / Suspended</b>	Surface
<b>Warranty (Years)</b>	5
<b>CE Mark</b>	Yes
<b>Length (mm)</b>	260
<b>Width (mm)</b>	260
<b>Depth (mm)</b>	75



## Technical Information

<b>Wattage</b>	14W
<b>Lumens Delivered</b>	1269lm (Cool White), 1170lm (Warm White)
<b>Lm/W</b>	91lm (Cool White), 84lm (Warm White)
<b>CRI</b>	Ra 80
<b>CCT</b>	3000/4000K
<b>Input</b>	230V
<b>Hertz</b>	50Hz
<b>Operating Temp</b>	-10°C to 25°C

# Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

<b>Suitable for wall mounting</b>	Yes
<b>Suitable for suspended mounting</b>	No
<b>Suitable for ceiling mounting</b>	Yes
<b>Suitable for built-in mounting</b>	No
<b>Suitable for surface mounting</b>	Yes
<b>With light source</b>	Yes
<b>Suitable for number of lamps</b>	1
<b>Material housing</b>	Plastic
<b>Colour housing</b>	White
<b>Nominal voltage</b>	230-230 V
<b>Control gear included</b>	Yes
<b>Degree of protection (IP)</b>	IP65
<b>Impact strength</b>	IK09
<b>Protection class</b>	I
<b>Suitable for emergency lighting</b>	Yes
<b>With movement sensor</b>	No
<b>With light sensor</b>	No
<b>Max. system power</b>	14 W
<b>Colour of light</b>	White
<b>Colour temperature</b>	3000-4000 K
<b>Colour rendering index CRI</b>	80-89
<b>Height/depth</b>	75 mm
<b>Length</b>	260 mm

Datasheet generated from <https://onetimepim.com> last updated Monday, September 6, 2021 1:43:20 PM

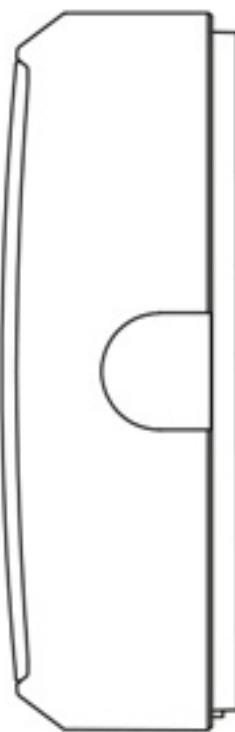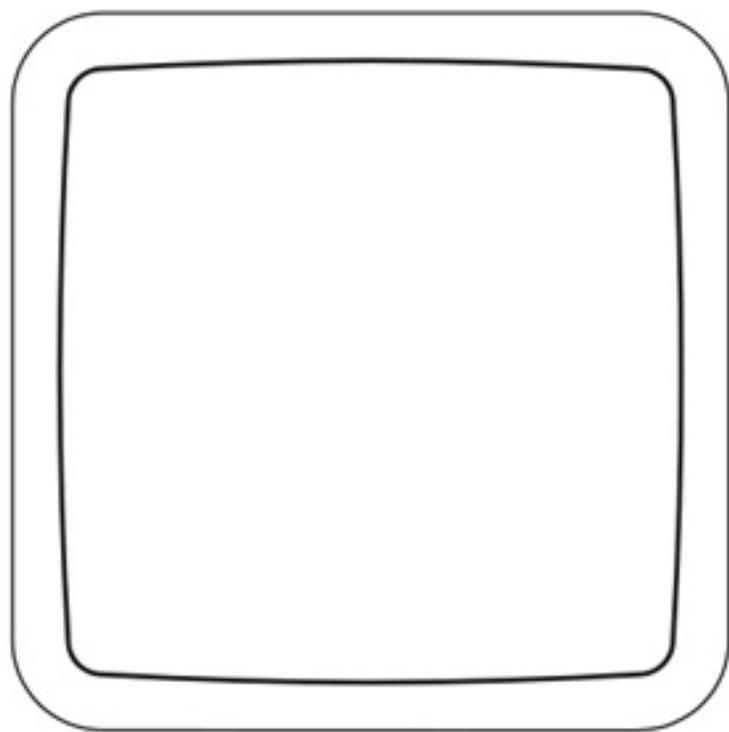

260

75