

# Product Selector


## EURO MULTIMEDIA MODULES

TV CO-AXIAL OUTLETS FOR DIGITAL TV SCREENED  
NON ISOLATED

HDMI

AUDIO

BLANKS

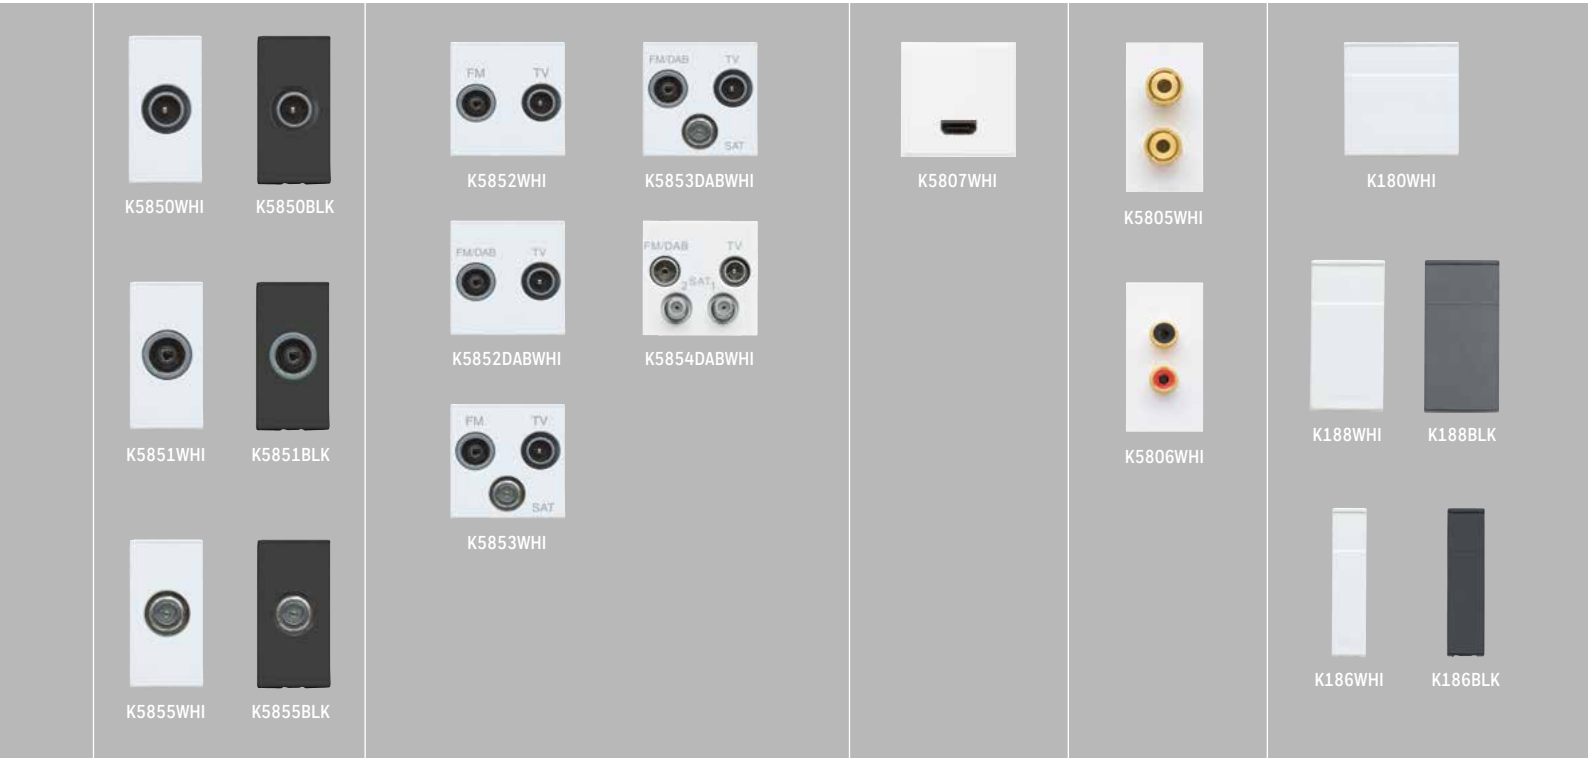

**K5850WHI**  
**K5850BLK**  
SINGLE OUTLET (IEC MALE)  
ONE MODULE 25 X 50MM  
**K5851WHI**  
**K5851BLK**  
SINGLE OUTLET  
(IEC FEMALE)  
ONE MODULE 25 X 50MM  
**K5855WHI**  
**K5855BLK**  
SINGLE F-TYPE SATELLITE  
SOCKET  
ONE MODULE 25 X 50MM

Full screened non isolated TV outlets  
containing a combination of single, TV/FM  
Diplexer and TV/FM/SAT Triplexer for use  
within digital TV systems and interactive TV  
services. Single outlets for connection to a  
single TV, FM or Satellite co-axial aerial lead.

**K5852WHI**  
**K5852BLK**  
TWIN OUTLET  
TV/FM DIPLEXER  
TWO MODULE 50 X 50MM  
(IRELAND ONLY)  
**K5852DABWHI**  
**K5852DABBLK**  
TWIN OUTLET TV-FM/DAB  
DIPLEXER  
TWO MODULE 50 X 50MM  
**K5853WHI**  
**K5853BLK**  
TRIPLE OUTLET  
TV/FM/SATELLITE TRIPLEXER  
TWO MODULE 50 X 50MM  
(IRELAND ONLY)

TV/FM diplexer units for connection to a single co-axial aerial lead with combined  
TV and FM signals.  
TV/FM/SAT triplexer units for connection to a single co-axial aerial lead with combined  
TV, FM and Satellite signals

**K5853DABWHI**  
**K5853DABBLK**  
TRIPLE OUTLET  
TV-FM/DAB-SAT TRIPLEXER  
TWO MODULE 50 X 50MM  
**K5854DABWHI**  
**K5854DABBLK**  
QUAD OUTLET  
TV-FM/DAB-2XSAT  
TWO MODULE 50 X 50MM

**K5807WHI**  
**K5807BLK**  
FEMALE HDMI OUTLET  
  
*K5807 Female HDMI Outlet is  
HDMI 1.1, 1.2,  
1.3 and 1.4 compatible, HDCP  
compliant.*  
**DATA RATE**  
Up to 2.25 Gbps  
**SCAN**  
Up to 1080p/1920x1200  
**INPUT CONNECTOR**  
1 x HDMI Female (Type A)  
**OUTPUT CONNECTOR**  
1 x HDMI Female (Type A)  
Supports high resolution input  
**PC**  
VGA, SVGA, SXVGA (1280x1024)  
and UXGA (1600x1200,  
1920x1200)  
**HDTV**  
480p, 720p, 1080i and 1080p  
HDMI input cable should be no larger  
than 20m.  
**DIMENSIONS**  
50 x 50 x 20mm

**K5805WHI**  
**K5805BLK**  
AUDIO BINDING POST  
SET FOR SINGLE LOUD  
SPEAKER  
**K5806WHI**  
**K5806BLK**  
RCA TO SCREW  
TERMINATION SET  
1 RED AND 1 BLACK

**DIMENSIONS**  
50 x 25 x 28mm

**K180WHI**  
TWO MODULE  
BLANK 50 X 50MM  
**K188WHI**  
**K188BLK**  
ONE MODULE  
BLANK 25 X 50MM  
**K186WHI**  
**K186BLK**  
HALF MODULE  
BLANK 12.5 X 50MM

BS 5733:2010 where applicable

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications

### MOUNTING BOXES

Min box depth 32mm

### DIMENSIONS

1 Module 25 x 50mm

2 Module 50 x 50mm

BS 3041:1997

IEC 169-2:1965

BS EN 50083 & BS 5733:2010

where applicable

### PERFORMANCE

### SINGLE OUTLETS

TV/FM Iec Male Or Female

DC-950MHz

SAT F-TYPE

DC-1.75GHz

### TV/FM/SAT PRODUCTS

Outlet:

TV:

FM/DAB:

SAT:

Outlet:

TV:

FM:

SAT1:

Diplexer

5-65MHz

470-862MHz

87.5-108MHz

N/A

Triplexer

5-65MHz

470-862MHz

87.5-108MHz

950-2300MHz

### TV/FM/DAB/SAT PRODUCTS

### FOR DIGITAL RADIO

Outlet:

TV:

FM/DAB:

SAT OR SAT1:

SAT2:

Outlet:

TV:

FM:

SAT1:

SAT2:

Diplexer

5-65MHz

470-862MHz

87.5-230MHz

N/A

Triplexer

5-65MHz

470-862MHz

87.5-230MHz

950-2300MHz

5-2300MHz