



# MASTERColour CDM-TC



## MASTERColour CDM-TC 70W/830 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information		Colour designation	
Cap base	G8.5 [ G8.5]	Warm white (WW)	
Operating position	UNIVERSAL [ Any/Universal]	Lumen maintenance 10,000 hours (nom.)	65 %
Life to 5% failures (nom.)	9000 h	Lumen maintenance 2,000 hours (min.)	75 %
Life to 10% failures (nom.)	8000 h	Lumen maintenance 2,000 hours (nom.)	85 %
Life to 20% failures (nom.)	9000 h	Lumen maintenance 5,000 hours (min.)	65 %
Life to 50% failures (nom.)	12000 h	Lumen maintenance 5,000 hours (nom.)	75 %
ANSI code HID	C139/E	Chromaticity coordinate X (nom.)	0.434
	Sphere	Chromaticity coordinate Y (nom.)	0.398
		Correlated Colour Temperature (Nom)	3000 K
		Luminous efficacy (rated) (nom.)	86 lm/W
		Colour rendering index (nom.)	83
Light technical		Operating and electrical	
Colour Code	830 [ CCT of 3,000 K]	Power (Rated) (Nom)	73.2 W
Luminous flux (nom.)	6300 lm		
Luminous flux (rated) (nom.)	6300 lm		

# MASTERColour CDM-TC

Lamp current run-up (max.)	1.4 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition peak voltage (min.)	3500 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	87 V
Voltage (Min)	78 V
Voltage (Nom)	83 V

## Controls and dimming

Dimmable	No
Run-up time 90% (max.)	3 min

## Mechanical and housing

Lamp Finish	Clear
Bulb material	UV-Block Quartz
Bulb shape	T14 [ T 14 mm]

## Approval and application

Energy Efficiency Class	G
Mercury (Hg) content (max.)	4.6 mg
Mercury (Hg) content (nom.)	4.6 mg
Energy consumption kWh/1,000 hours	74 kWh
	473344

## UV

PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (max.)	0.3


## Luminaire design requirements

Bulb temperature (max.)	550 °C
Pinch temperature (max.)	300 °C
Pinch Temperature (Max)-DUP(do not use)	300 °C

## Product data

Full product code	871150020167615
Order product name	MASTERColour CDM-TC 70W/830 G8.5 1CT/12
EAN/UPC – product	8711500201676
Order code	20167615
Local order code	70CDMTC830
SAP numerator – quantity per pack	1
Local code description	8348275
Numerator – packs per outer box	12
SAP material	928086505131
Net Weight (Piece)	0.010 kg
ILCOS code	MT/UB-70/830-H-G8.5-17/85

## Dimensional drawing




MASTERColour CDM-TC 70W/830 G8.5 1CT/12


Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-TC 70W/830 G8.5 1CT/12	15 mm	0.5 in	7 mm	51 mm	53 mm	52 mm	85 mm

MASTERCoulour CDM-TC

Photometric data

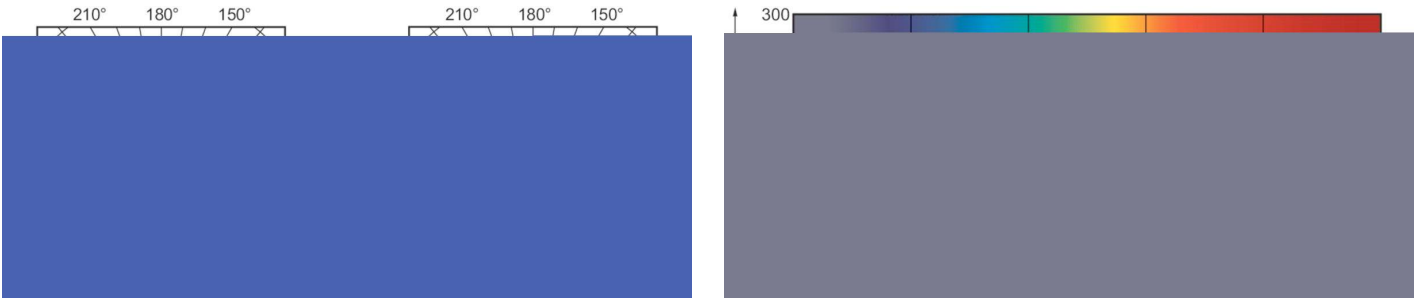

Lifetime

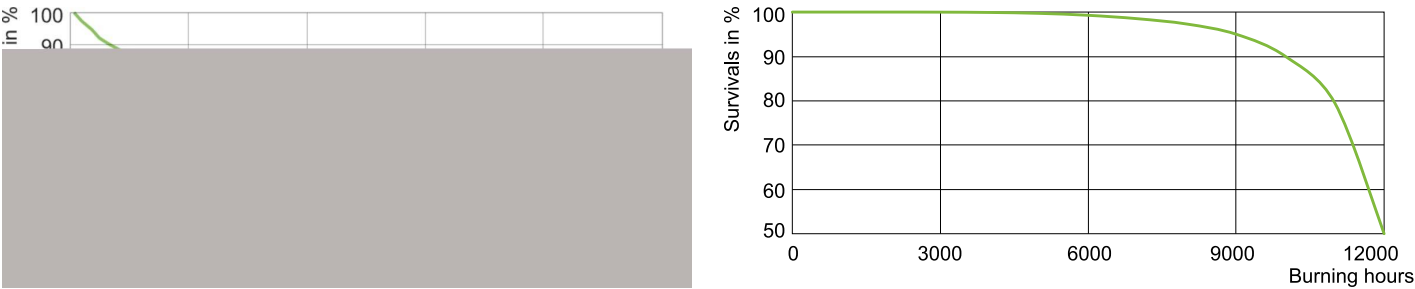

LDLE\_CDM-TC\_0001-Life expectancy diagram

