



ADLED2/WV/CCT

Delta LED CCT 7/13W - White / Visiluxe



Features

All polycarbonate multi-purpose LED round bulkhead suitable for ancillary areas and industrial applications

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching




General Information

Lamp Type	LED
Colour / Finish	White / Visiluxe
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 56,000
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	290
Depth (mm)	65
Accessories	ADLED2/BZ/EYE/B, ADLED2/BZ/EYE/W, ADLED2/BZ/GRILL/B, ADLED2/BZ/GRILL/W

Technical Information

Wattage	7/13W
Lumens Delivered	940/1640lm (4000K, 7/13W)
Lm/W	135/125lm (4000K, 7/13W)
Beam Angle	115
CRI	Ra 80
CCT	3000/4000K
Input	230V
Hertz	50Hz
Operating Temp	-10°C to 25°C
SDCM	6

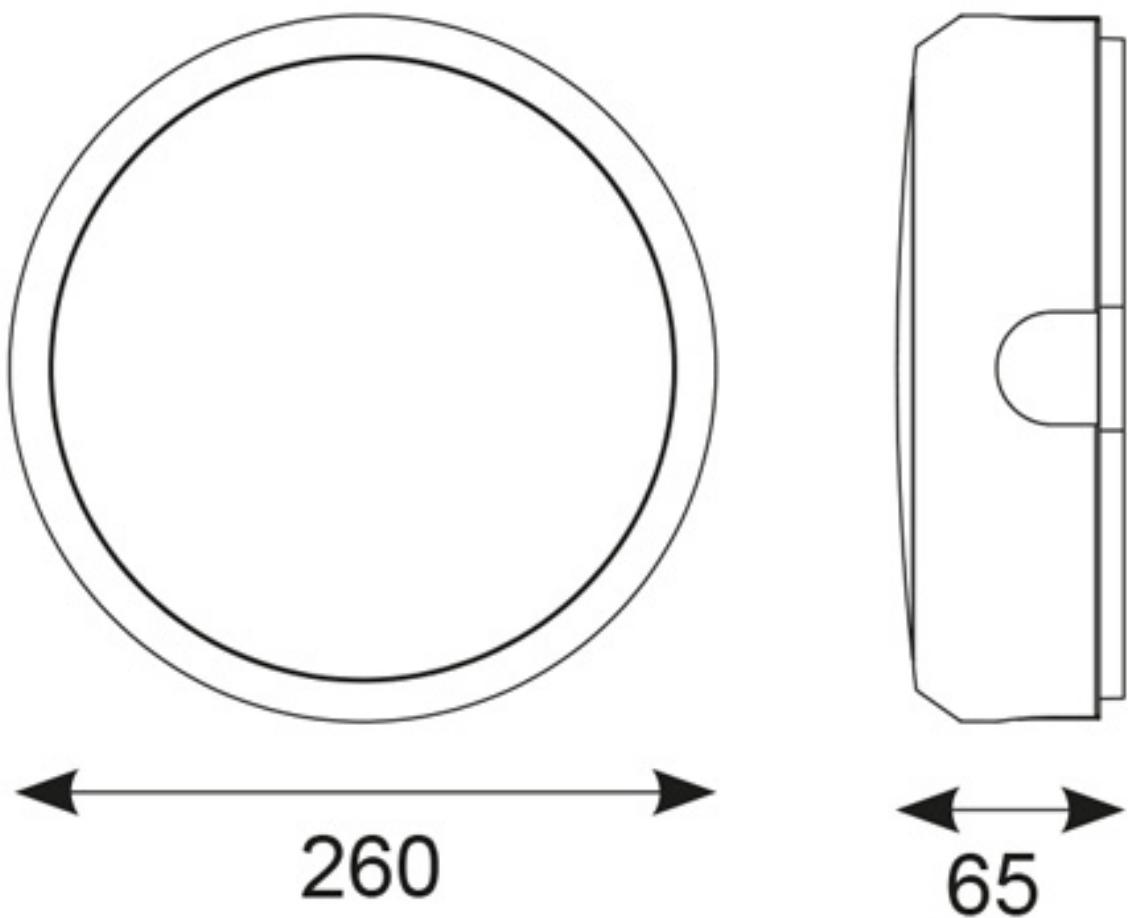

Datasheet generated from <https://onetimepim.com> last updated Wednesday, June 15, 2022 9:14:18 AM